
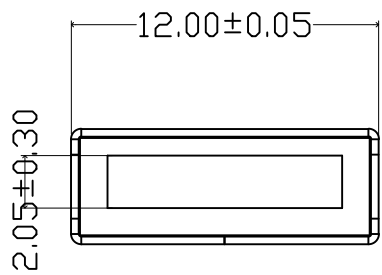
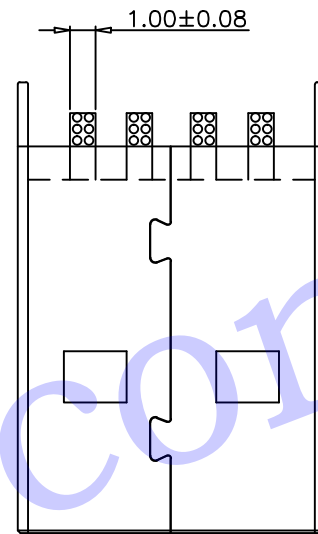
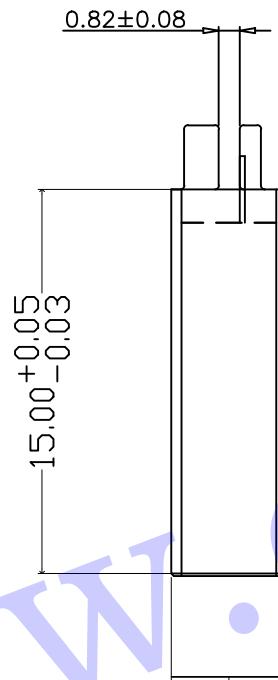


REV.	ECN. NO.	APPD.

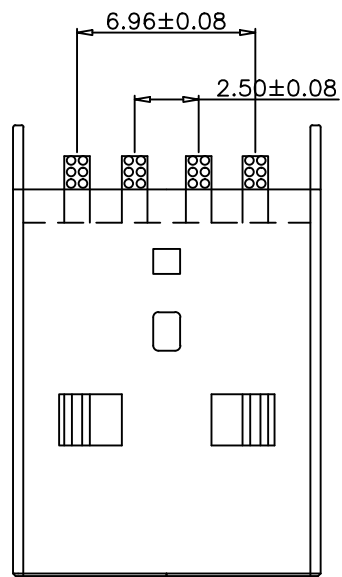

特性: Specificationg:  
 电器: Electrical:  
 接触阻抗: Contact Resistance:  
 30 milliohms MAX  
 耐电压: Dielectric Withstanding Voltage:  
 100V AC AT Sea Level  
 绝缘阻抗: Insulation Resistance:  
 110 MEGA ohms MIN

材料: Material:  
 塑胶: Housing Hing Temperature Thermoplastics  
 PBT UL 94V-0塑胶  
 端子: Contact: C2680 (H65)黄铜 T=0.2mm  
 外铁壳: Shell:SPCC 铁 T=0.3mm  
 端子: Contact:Plated Gold in Mating Area,  
 Tin On solder Talls  
 接触点镀金1U", 焊锡脚镀锡100-120U".  
 盐雾测试过24小时.

X. ±0.50	X.* ± 2°	UNITS mm
.X ±0.30	.X* ± 1°	
.XX ±0.10	.XX* ± 0.5°	MAT'L /
.XXX ± 0.05		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHUANGYUE TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHUANGYUE TECHNOLOGY CO., LTD		FINISH /
		Q'TY /

深圳市创粤科技有限公司		
TITLE: A公2.0夹板公头 L15.0MM		
APPD: 陈俊杰	DWG NO.: CY-HAM2-4P-150	
CHKD: 陈志南	SCALE	SHEET
DR: 林德成	1/1	1/1
	REV.	A1